


SYSTEM SETUP

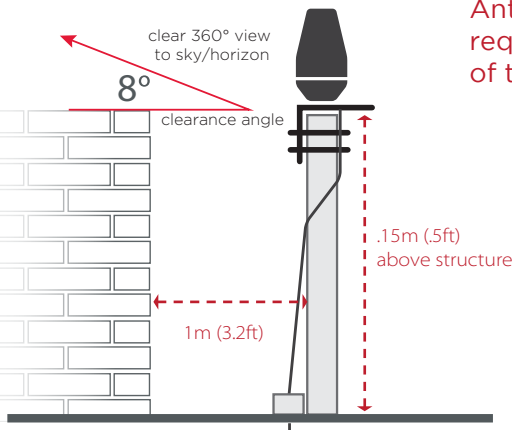

Antenna selection is based on required cable length. Use **ONLY ONE** of the part numbers below:

- ASE-FA12** 12M (39 ft.), LMR400, TNC termination
- ASE-FA20** 20M (65 ft.), LMR600, TNC termination
- ASE-AA511-40** 40M (131ft.), LMR240, Power Amplifier, TNC pigtail term.
- ASE-AA511-70** 70M (229 ft.), LMR400, Power Amplifier, TNC pigtail term.

Lightning Arrester
ASE-LA01/02
optional as required



ASE DOCKING STATION

ASE-DK075
or
ASE-DK050



Intelligent Handset



(optional privacy headset available)

Wireless Phone System



Analog Phone
ASE-PT01



Central Office Interface - PBX



or

or

10-32VDC, 18W
12V, 1.5A

UNIVERSAL
AC/DC Power Supply

POTS connection, up to 3000m (9842) length RJ11/Two wire
POTS connection in **ASE-DK075** only

