

# SYSTEM SETUP

**clear 360° view  
to sky/horizon**


Attach to metal ground plane for best results -  
i.e. automobile,  
corrugated roofing, etc

 Magnetic mount, dual mode  
(IRID/GPS) antenna



6V, 1.5A

Use Iridium supplied 6V  
or 9575 wall charger  
**-charge dock for 5 hours  
for full charge**

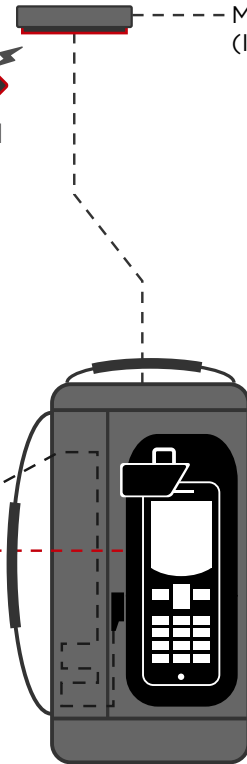

## Rapid Deployment

1. Uncoil and place antenna with view of Iridium satellite constellation/clear sky view
2. With the phone docked, press the Power button on the top of the 9575 phone to power up both phone and dock.
3. Connect Iridium supplied charger to charge both dock and Iridium 9575 phone - fully charged dock battery provides approx. 15 hours of service.
4. In PTT mode the indicator light will go **GREEN** when dock and Iridium handset are connected, and **AMBER** in standard mode.





PTT



STANDARD

**CHARGING**

**AUDIO**



GPS IRID

**RJ45**  
External  
Accessories

